

Fin color:



White Silver Black

**Line Voltage**

**R-30 F**

80 degree beam

120V / 220V line current

Medium screw base: E26, E27

50,000 hour rated life

**Replaces:**

65W Incandescent /  
26W Compact Fluorescent

**Par 30 LED Lamp**

15 Watt typical (22W max)

**Light Output**

310-370 Lumen (useful)

**Indoor/Outdoor**

wet and dry locations

**White (3) Color Temperatures:**

- Warm** White (2700K)
- Neutral** White (3500K)
- Cool** White (4500K)

**Operating:**

Open Air Fixtures -4°F to 105°F  
-20°C to 40°C

Dimmable with reverse phase control dimmers or the continuous current (sine wave) control dimmers.

See [enLuxLED.com](http://enLuxLED.com) for a list of tested compatible dimmers.

Weight: 9 oz.

UL /CUL/CE /C-Tick rated




3-Year Warranty

**Performance:**

**enLux RGB LED** Light for general illumination is powered by it's proprietary, patented Solid State C.O.B. Light Engine coupled with it's unique patented thermal management components providing high efficacy and maximum energy efficiency-15 Watts typical.

The **enLux R-30 Series LED** Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, 100% recyclable (no mercury or hazardous materials).






**R30F Down Light Photometrics**

0 ft Illuminances Distribution Ratio

3 ft	-	-	-	0.420	1.000	
6 ft	-	-	0.105	0.173	0.250	
9 ft	-	0.047	0.061	0.093	0.111	
12 ft	0.026	0.035	0.043	0.057	0.063	
15 ft	0.017	0.020	0.026	0.031	0.038	
	15 ft	12 ft	9 ft	6 ft	3 ft	CL

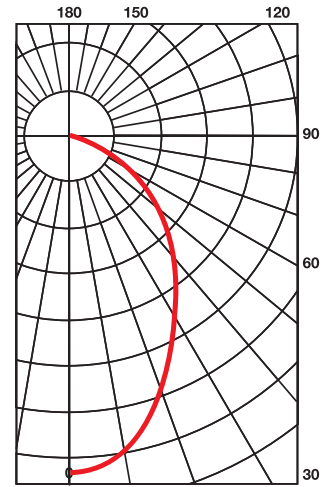

**R30F Illuminance at Beam Centerline**

White	CCT	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Warm	2700°K	0011XX	310	215.2	53.8	23.9	13.4	8.6
Neutral	3500°K	0013XX	340	239.1	59.8	26.6	14.9	9.6
Cool	4500°K	0014XX	370	263.0	65.	29.2	16.4	10.5

Unit in lux  
1 lux = 0.0929 footcandle (fc)

**R30F White E26/E27 Base**

Product Code	White Light CCT	Voltage	Fin Color
<b>00</b>	<b>11</b> Warm (2700°K)	<b>0</b> 120V Dimmable	<b>0</b> White
	<b>13</b> Neutral (3500°K)	<b>1</b> 110V Dimmable	<b>1</b> Black
	<b>14</b> Cool (4500°K)	<b>2</b> 220V(200~250V) Non-dimmable	<b>2</b> Silver
	<b>91</b> Warm Hi-CRI (2700°K)	<b>3</b> 100V Dimmable	
	<b>93</b> Neutral Hi-CRI (3500°K)	<b>4</b> 120V (100~130V) Non-dimmable	
	<b>94</b> Cool Hi-CRI (4500°K)		

**Examples**

- 001102** R30 Flood Warm White 120V Silver Fin
- 001301** R30 Flood Neutral White 120V Black Fin
- 001430** R30 Flood Cool White 100V White Fin
- 009401** R30 Flood Cool White Hi-CRI 120V Black Fin

