


Fin color:



White

Line Voltage

R-30 W

160 degree beam

120V / 220V line current

Medium screw base: E26, E27/ GU-24 Pin base*

* California Title 24 requirement

50,000 hour rated life

Replaces:

65W Incandescent /
26W Compact Fluorescent

Par 30 LED Lamp

15 Watt typical (22W max)

Light Output

420-500 Lumen (useful)

Indoor/Outdoor

wet and dry locations

White (3) Color Temperatures:

- Warm** White (2700K)
- Neutral** White (3500K)
- Cool** White (4500K)

Operating:

Open Air Fixtures -4°F to 105°F
-20°C to 40°C

Dimmable with reverse phase control dimmers or the continuous current (sine wave) control dimmers.

See enluxLED.com for a list of tested compatible dimmers.

Weight: 9 oz.

UL /CUL/CE /C-Tick rated



3-Year Warranty

Performance:

enLux RGB LED Light for general illumination is powered by it's proprietary, patented Solid State C.O.B. Light Engine coupled with it's unique patented thermal management components providing high efficacy and maximum energy efficiency-15 Watts typical.

The **enLux R-30 Series LED** Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, **100% recyclable** (no mercury or hazardous materials)**.

** California Title 22 compliant







R30W Down Light Photometrics

0 ft Illuminances Distribution Ratio

| | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|
| 3 ft | 0.060 | 0.140 | 0.240 | 0.440 | 0.740 | 1.000 |
| 6 ft | 0.085 | 0.110 | 0.145 | 0.185 | 0.220 | 0.250 |
| 9 ft | 0.058 | 0.071 | 0.082 | 0.092 | 0.103 | 0.111 |
| 12 ft | 0.042 | 0.046 | 0.051 | 0.055 | 0.060 | 0.063 |
| 15 ft | 0.030 | 0.032 | 0.034 | 0.036 | 0.039 | 0.040 |
| | 15 ft | 12 ft | 9 ft | 6 ft | 3 ft | CL |

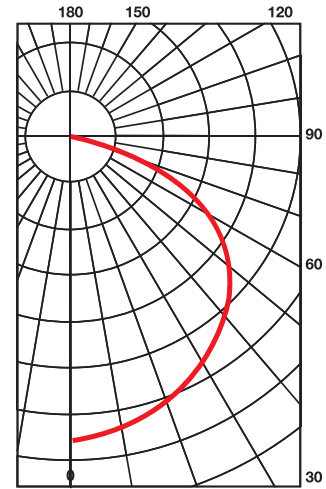

R30W Illuminance at Beam Centerline

| White | CCT | P/N | Total Lumen | Throw Distance (feet) | | | | |
|---------|--------|--------|-------------|-----------------------|------|------|-----|-----|
| | | | | 3 | 6 | 9 | 12 | 15 |
| Warm | 2700°K | 0211X0 | 420 | 131.5 | 32.9 | 14.6 | 8.2 | 5.3 |
| Neutral | 3500°K | 0213X0 | 460 | 137.5 | 34.4 | 15.3 | 8.6 | 5.5 |
| Cool | 4500°K | 0214X0 | 500 | 155.4 | 38.8 | 17.3 | 9.7 | 6.2 |


Unit in lux
1 lux = 0.0929 footcandle (fc)


R30W White E26/E27 / GU-24 Pin base

| Product Code | White Light CCT | Voltage | Fin Color |
|--------------|-----------------------------------|---------------------------------------|----------------|
| 02 | 11 Warm (2700°K) | 0 120V Dimmable | 0 White |
| | 13 Neutral (3500°K) | 1 110V Dimmable | |
| | 14 Cool (4500°K) | 2 220V (200~250V) Non-dimmable | |
| | 91 Warm Hi-CRI (2700°K) | 3 100V Dimmable | |
| | 93 Neutral Hi-CRI (3500°K) | 4 120V (100~130V) Non-dimmable | |
| | 94 Cool Hi-CRI (4500°K) | | |


Examples

- 021100** R30 Wide Flood Warm White 120V White Fin
- 021300** R30 Wide Flood Neutral White 120V White Fin
- 029400** R30 Wide Flood Cool White Hi-CRI 100V White Fin

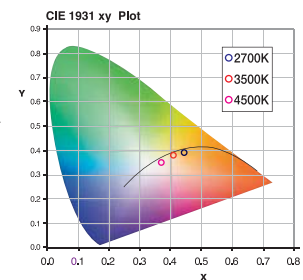

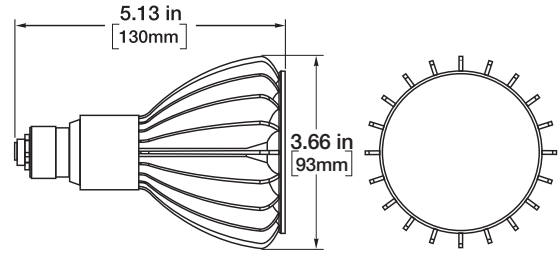

Fin color:



White

Line Voltage

R-30 W
160 degree beam

120V / 220V line current

Medium screw base: E26, E27/ GU-24 Pin base*
* California Title 24 requirement

50,000 hour rated life

Replaces:

100 - 200W Color Incandescent /
26W Compact Fluorescent

Par 30 LED Lamp

15 Watt typical (22W max)

Light Output

- Red** - 365lm
- Green** - 610lm
- Blue** - 270lm
- Amber** - 285lm

Indoor/Outdoor

wet and dry locations

- Color:
- Red** 620nm
 - Green** 535nm
 - Blue** 465nm
 - Amber** 589nm
 - Custom **CIE 1931**

Operating:

Open Air Fixtures -4°F to 105°F
-20°C to 40°C

Dimmable with reverse phase
control dimmers or the continuous
current (sine wave) control dimmers.

See enLuxLED.com for a list of tested
compatible dimmers.

Weight: 9 oz.

UL /CUL/CE /C-Tick rated



3-Year Warranty

Performance:

enLux RGB LED Light for general illumination is powered by its proprietary, patented Solid State C.O.B. Light Engine coupled with its unique patented thermal management components providing high efficacy and maximum energy efficiency-15 Watts typical. The **enLux R-30 Series LED** Light aluminum housing is finished in a ultra durable

top coat, will not shatter or break when dropped. Safe, cool to touch, 100% recyclable (no mercury or hazardous materials)**.

enLux RGB LED Color Light emits Twice-the-Light as a 100 Watt color filtered incandescent accent floodlight-using only 15 Watts typical.

** California Title 22 compliant



